TOTALINE THERMOSTATS

Totaline provides you a complete line of thermostats ready to compete against anyone in the industry. And they're Totaline Tough, Totaline Guaranteed!

The Totaline Thermostat offering comes in 4 unique series to meet your every need:

- Mercury-free
- All-electronic
- Large LCD displays
- Competitively priced
- Compatible with nearly all models
- Commercial and residential thermostats

- **Totaline** Gold Series: Our premium line with premium features
- **Totaline** Signature Series: Our complete line of full-feature, value-priced thermostats
- **Totaline** Star Series: Full-featured and priced to compete
- **Totaline *SPECIALTY*** Series: Full featured stats of unique style & characteristics

RESIDENTIAL STANDARD TOTALINE GOLD THERMOSTATS

24 VOLT, NON-PROGRAMMABLE

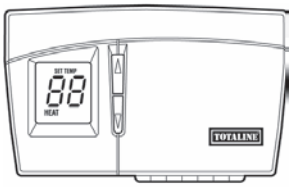

P4704

STANDARD FEATURES:

- Battery or system powered
- Separate set points for heat/cool
- Auto changeover, ability to disable auto changeover function
- Large numbers on backlit display
- Low battery indicator
- Keypad lockout
- Fahrenheit/Celsius display
- Adjustable clean filter timer
- Built-in logic droop less control
- 5 minute built-in compressor protection
- Outdoor sensor-capable (P274-0200-C, P274-0300-C)
- Auxiliary heat indicator (P274-0200-C, P274-0300-C), auxiliary heat lockout
- Energize 125 reversing valve with "B" or "O" terminal (P274-0200-C, P274-0300-C)
- Thermostat "offset" (calibration) capability

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D
P274-0100-C	1H, 1C	Heat/Cool	3-1/2" x 5-3/4" x 1-3/8"
P274-0200-C	2H, 1C	Heat Pump	3-1/2" x 5-3/4" x 1-3/8"
P274-0300-C	3H, 2C	Multi-stage	3-1/2" x 5-3/4" x 1-3/8"

TOTALINE THERMOSTATS

RESIDENTIAL PROGRAMMABLE TOTALINE GOLD THERMOSTATS

24 VOLT

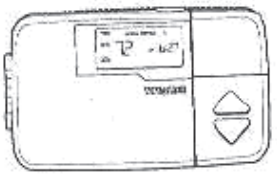

P563Y

STANDARD FEATURES:

- 7-day programming with 4 independent settings per day
- “Smart” features including self-prompting programming
- Separate setpoints for heat/cool
- Auto changeover, ability to disable auto changeover function
- Clock is retained for 72 hours during power failure. Program is Neverlost™.
- Large numbers on backlit display
- Battery-less operation
- Built-in logic for droop less control
- 5 minute built-in compressor protection
- Outdoor sensor-capable (P274-1200, P274-1300)
- Auxiliary heat indicator (P274-1200, P274-1300), auxiliary heat lockout
- Fahrenheit/Celsius display
- Thermostat “offset” (calibration) capability

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING
P274-1100	1H, 1C	Heat/Cool	4-1/4" x 7-1/2" x 1-7/16"	7-Day
P274-1200	2H, 1C	Heat Pump	4-1/4" x 7-1/2" x 1-7/16"	7-Day
P274-1300	3H, 2C	Multi-stage	4-1/4" x 7-1/2" x 1-7/16"	7-Day

*These thermostats require a common wire.

COMMERCIAL PROGRAMMABLE TOTALINE GOLD THERMOSTATS

24 VOLT MULTI-STAGE

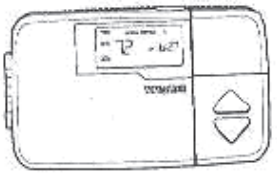

P563Y

STANDARD FEATURES:

- 7-day programming with 4 independent settings per day
- Uses commercial language
- “Smart” features including self-prompting programming
- Keypad lockout
- Separate setpoints for heat/cool
- Auto changeover
- Clock is retained for 72 hours during power failure. Program is Neverlost™.
- Large numbers on backlit display
- Fahrenheit/Celsius display
- Adjustable clean filter timer
- Battery-less operation
- Built-in logic for droopless control
- 5 minute built-in compressor protection
- Outdoor sensor capable
- Remote sensor capable
- Auxiliary heat indicator
- Thermostat “offset” (calibration) capability
- Remote sensor “offset” (calibration) capability
- Emergency heat available as a dipswitch
- Optional continuous fan during unoccupied periods
- Hold button can hold indefinitely
- Override button - adjustable 1-6 hours

NOTE: These thermostats require a common wire.

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING
P274-2100	3H, 2C	Multi-stage	4-1/4" x 7-1/2" x 1-7/16"	7-Day

TOTALINE THERMOSTATS

RESIDENTIAL PROGRAMMABLE SIGNATURE THERMOSTATS

24 VOLT HEAT/COOL/HEAT PUMP

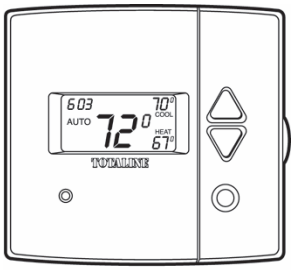

P1044

Slimline

STANDARD FEATURES:

- One for All™ design works with gas/electric, heat pump, multistage and hydronic systems.
- Dual set point with adjustable dead band
- Auto changeover
- Switched to non-prog. and/or manual changeover
- Backlit display buttons and legends
- Large numbers on backlit display
- Electrically switch-able “B” and “O” terminals
- Bi-color LED, red for heating, green for cooling
- 5 minute built-in compressor protection
- Auxiliary heat indicator
- Fahrenheit/Celsius display
- Neverlost™ (settings not lost during power failure)
- 3 Configured outputs for the most flexibility (except on P574-1700)
- UV lamp-service indictor
- Outdoor sensor ready
- Accepts the EZ Programmer
- Accepts the infrared receiver and remote control

P374-1700:

- Single day programmable with 4 time periods

P374-1800:

- 7-day programmable with 4 settings per day
- Energy Watch system for monitoring energy usage
- Control to, or monitor a 2nd sensor
- Displays high\low outdoor temps for the day
- Vacation Mode
- Accepts the humidity module for num / denum control
- Programmable fan with adjustable start and stop times
- Adjustable clean filter timer

P374-1900:

- Humidity module is built in
- Dual fuel capable
- Advanced heat pump operation
- Dry contact equipped
- EZ Trap ready

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING
P374-1700	2H, 1C	H/C or HP	4.3" x 4.8" x 1.1"	1-day
P374-1800	3H, 2C	H/C or HP	4.3" x 4.8" x 1.1"	7-day
P374-1900	3H, 2C	H/C or w/hum	4.3" x 4.8" x 1.1"	7-day

TOTALINE THERMOSTATS

COMMERCIAL SIGNATURE THERMOSTATS

24 VOLT HEAT/COOL/ HEAT PUMP

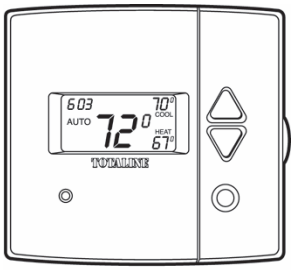

P1044

Slimline

STANDARD FEATURES:

- One for all design works gas/electric, heat pump, multistage, and hydronic systems
- Dual set point with adjustable deadband
- Auto changeover
- Switched to non-prog. and/or manual changeover
- Backlit display, buttons and legend
- Bi-color LCD red for heating, green for cooling
- UV lamp service indicator
- Outdoor sensor ready
- Accepts the EZ Programmer
- Infrared receiver and remote control
- 5 minute built-in compressor protection
- Adjustable clean filter timer
- Fahrenheit/Celsius display
- Thermostat locking
- 3 configurable outputs for the most flexibility

P374-2700 Non Programmable Model feature:

- Configurable dry contact
- Duct sensor capability (read/control)
- Soft-start capability-sequential starting of multiple units
- Programmable with external time clock
- Control to or monitor a 2nd sensor
- EZ trap ready

P374-2800 Programmable Model feature:

- 7 Day programmable
- 4 settings per day
- Displays high or low outdoor temps for the day
- 3 security levels of thermostat locking
- 4 hour override
- Holiday programming
- Clock retained for 48 hours during power failure. Program is Neverlost™ (setting not lost during power failure)

P374-2900 "All-in-one" Model:

- All features from P374-2700 and P374-2800
- Economical control
- Can average up to 8 remote sensors, wired and wireless
- Economizer
- Pre-occupancy purge
- Advanced heat pump operation
- Reheat capable /option humidity module insulated
- Light activation option built in

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING
P374-2700	2H, 2C	H/C, HP	4.3" x 4.8" x 1.1"	Non programmable
P374-2800	3H, 2C	H/C, HP	4.3" x 4.8" x 1.1"	7-day
P374-2900	3H, 2C	H/C, HP	4.3" x 4.8" x 1.1"	7-day

TOTALINE THERMOSTATS

RESIDENTIAL STAR THERMOSTATS

24 VOLT, NON-PROGRAMMABLE BUILDERS STAT



P1040

STANDARD FEATURES:

- Slim, low-profile design
- Full range of compatibility
- Fahrenheit/Celsius display
- Electronic anticipator adjustment
- 5 minute compressor protection
- All-electronic easy-to-read display
- Auxiliary heat indicator
- Configurable reversing valve “B” or “O” terminal
- Functionally equivalent to HW T87F and White Rodgers 1F56-444
- Calibration capability

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D
P374-0000	1C	Cooling Only	2-3/4" x 4-1/4" x 13/16"
P374-0100	1H	Heat Only	2-3/4" x 4-1/4" x 13/16"
P374-0200	1H, 1C	Heat/Cool	2-3/4" x 4-1/4" x 13/16"
P374-0300	2H, 1C	Heat Pump	2-3/4" x 4-1/4" x 13/16"

RESIDENTIAL STANDARD STAR THERMOSTATS

24 VOLT, NON-PROGRAMMABLE HEAT/COOL/HEAT PUMP

P1041

“ONEforALL”

P474-0100 Model Provides:

- One for ALL™ design works with gas/electric, heat pump, multistage, and hydronic systems
- Fahrenheit/Celsius display
- All-electronic easy-to-read display
- Battery-less operation
- 5 minutes built-in compressor protection
- Reversing valve actuated on either “B” or “O” terminals
- Keypad lockout
- Backlit display

P474-0220 Model Provides:

- Digital continuously backlit thermostats, replaces 2 wire mechanical stats
- Only 2 wires needed to power thermostat and no batteries required
- Heat only or cool only, selectable in setup
- Thermostats locking
- Display shows set points and room temperatures simultaneously
- 5 minute built-in compressor protection

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D
P474-0100	2H, 2C	HC/HP	3.14" x 3/14" x 1.33"
P474-0220	1H or 1C	H or C	3.14" x 3/14" x 1.33"
P474-1010	2H, 2C	HC/HP	3.14" x 3/14" x 1.33"

TOTALINE THERMOSTATS

RESIDENTIAL PROGRAMMABLE STAR THERMOSTATS

P474-1050
- Large, LCD display
- Four wire compatible
- 5 & 2 Day programming

P474-1020
- Two wire heating or cooling only
- Seven day programmable
- Optional outdoor sensor

	STAGES		
PART NO	STAGES	FUNCTION	DIMENSIONS
P474-1020	1H, 1C	Two wire H or C	3-1/16" x 3-1/16"
P474-1050	2H, 1C	HC/HP	3-1/16" x 3-1/16"

RESIDENTIAL BATTERY STAR THERMOSTATS

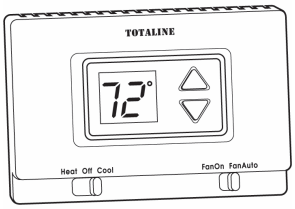

P4416

P474-0130 Standard Model:
- Battery operated 2, 3, and 4 wire applicable
- Large LCD Display
  - Room temperature display
  - Set temperature displayed on button press
- Easy to operate with Heat/Off/Cool and Fan On/Fan Auto switches
- Compatible with Heat Pump, Gas/Electric, 24 VAC, DC and millivolt systems

P474-0140 Heat Pump Model
- For heat pump applications ONLY
- Battery operated or 5 wire
- Easy to use Aux Heat switch on the side
- Allows choice of Energy Savings mode, Normal Operation, or Emergency Heat

P474-1035 5+2 Day Programmable Model Provides:
- Battery operated and/or system powered. Works with 2, 3, 4 and 5 wire systems. Battery runs thermostat in case of power failure
- Weekday/weekend program for comfort and energy savings
- Large, backlit LCD display
- Bi-color LED Heat/Cool indicator
- Non-volatile memory
- Separate Heat/Cool set points
- Easy to operate with Heat/Off/Cool and Fan On/Fan Auto switches
- Easy to program with 3 position program switch - Run/Set/Off
- Heat Pump compatible. Works with DC and millivolt systems when battery powered

	STAGES		
PART NO	Heat/Cool	Heat Pump	DESCRIPTION
P474-0130	1H, 1C	1H, 1C	Non-Programmable
P474-1035	1H, 1C	1H, 1C	5+2 Day Programmable
P474-0140		2H, 1C	Non-Programmable

TOTALINE THERMOSTATS

COMMERCIAL PROGRAMMABLE STAR THERMOSTATS

24 VOLT HEAT/COOL/ HEAT PUMP



Commercial1 Thermostat

P4342



Commercial Thermostat with Locking Cover

"ONEforALL"

STANDARD FEATURES:

- New "Star" design
- One for All™ design works with gas/electric, heat pump, multistage, and hydronic systems
- Dual set point with adjustable deadband
- Auto changeover
- Large numbers on backlit display
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- 5 minute built-in compressor protection
- Fahrenheit/Celsius display
- Keypad lockout
- Backlit display

P474-2050:

- International heating/cooling symbols
- Non-programmable
- Locking cover included. Cover is secure and tamperproof

P474-2150:

- Programmable with up to 4 time periods per day, separate weekday, Saturday and Sunday schedules
- Locking cover included. Cover is secure and tamperproof.
- 4 hour setback override timer
- Energy -saving Smart Fan
- Configurable display capable of single or dual set point operation

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING
P474-2050	2H, 2C	H/C, HP	3.14" x 3.14" x .97"	Non-Programmable
P474-2150	2H, 2C	H/C, HP	3.14" x 3.14" x .97"	5-1-1 day

TOTALINE THERMOSTATS

RESIDENTIAL PROGRAMMABLE SPECIALITY THERMOSTATS



P4341

"FLUSHMOUNT"

STANDARD FEATURES:

- Unique design — mounts flush to the wall
- Mounting bracket included for easy drywall installation, or fits in 2" x 4" junction box
- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual set point with adjustable deadband
- Auto changeover
- Large numbers on backlit display
- Electrically switch-able "B" and "O" terminals
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- 5 minute built-in compressor protection
- Programmable fan with adjustable start and stop times
- Outdoor temperature capable

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING
P374-1000FM	2H, 2C	H/C, HP	4.3" x 2.74" x .37"	Non-Prog. or 1- day Prog.
P374-1100FM	2H, 2C	H/C, HP	4.3" x 2.74" x .37"	7-Day

COMMERCIAL PROGRAMMABLE SPECIALITY THERMOSTATS



P2126

"FLUSHMOUNT"

STANDARD FEATURES:

- Unique design — mounts flush to the wall
- One for All™ design works with gas/electric, heat pump, multistage, and hydronic systems
- 7-day programmable with 4 settings per day
- Dual set point with adjustable deadband
- Auto changeover
- Large numbers on backlit display
- Electrically switch able "B" and "O" terminals
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- Energy saving smart fan
- 5 minute built-in compressor protection

P374-2300 FM Programmable Model Adds:

- Remote sensor capable
- Dry contact equipped
- Post purge fan
- Soft start capability - sequential starting of multiple units

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING
P374-2200FM	2H, 2C	H/C, HP	4.3" x 2.74" x .37"	7-Day
P374-2300FM	2H, 2C	H/C, HP	4.3" x 2.74" x .37"	7-Day

TOTALINE THERMOSTATS

RESIDENTIAL PROGRAMMABLE WIRELESS SPECIALITY THERMOSTATS

24 VOLTS



P1042



P1043

"WIRELESS"

This unique model is capable of wireless communication. Both receiver and Thermostats are paired to allow communication. However, each receiver is capable of "listening" to/from 1 to 4 thermostats/transmitters. In addition, each thermostat is capable of transmitting to multiple receivers.

- One for All™ design works with gas/electric, heat pump, multistage, and hydronic systems
- Dual set point with adjustable deadband
- Auto hangover
- Large numbers on backlit display
- Electrically switchable "B" and "O" terminals
- Transmission indicator
- 5 minute built-in compressor protection
- Fahrenheit/Celsius display
- Neverlost™ (settings not lost during power failure)
- 7-day programmable with 4 settings per day
- Programmable fan with adjustable start and stop times.

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	DESCRIPTION
P474-1100RF	2H, 2C	H/C, HP	4-3/4" x 3-1/4" x 1-1/4"	Thermostat/Transmitter
P474-1100REC	2H, 2C	H/C, HP	3-1/4" x 4-3/4" x 1-1/4"	Receiver

*Requires two AA lithium batteries.

COMMERCIAL PROGRAMMABLE WIRELESS SPECIALITY THERMOSTATS

24 VOLTS



P1042



P1043

"WIRELESS"

This unique model is capable of wireless communication. Both receiver and thermostat are paired to allow communication. However, each receiver is capable of "listening" to/from 1 to 4 thermostats/transmitters. In addition, each thermostat is capable of transmitting to multiple receivers.

- One for All™ design works with gas/electric, heat pump, multistage, and hydronic Systems
- Dual set point with adjustable deadband
- Auto changeover
- Large numbers on backlit display
- 5 minute built-in compressor protection
- Fahrenheit/Celsius display
- Thermostat locking
- Soft-start capability — sequential starting of multiple units
- Dry contact on receiver
- 7-day programmable
- 4 settings per day
- 3 security levels of thermostat locking
- 4-hour override
- Energy-saving Smart Fan
- Program is never lost during battery change
- "Battery Low" display on screen when battery needs to be changed

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING	DESCRIPTION
P474-2300RF	2H, 2C	H/C, HP	4-3/4" x 3-1/4" x 1-1/4"	7-day	Thermostat/Transmitter
P474-2300REC	2H, 2C	H/C, HP	3-1/4" x 4-3/4" x 1-1/4"	7-day	Receiver

*Requires two AA lithium batteries.

TOTALINE THERMOSTATS

RESIDENTIAL TOUCH SCREEN PROGRAMMABLE SPECIALTY THERMOSTATS

TOTAL TOUCH COMPLETE COMFORT



TotalTouch™
Complete Comfort

STANDARD FEATURES

- Touch screen display
- Configurable to programmable or nonprogrammable
- Positive or negative screen for night viewing
- Intuitive menu-driven program
- Programmable fan
- 12/24 hour clock and clock display
- Temperature display in F or C
- Programmable installer message
- Full/partial lock security mode

P286-1200
- 2H,1C

P286-1300
- Extra programmable output

P286-1400
- Humidity control

P286-1500
- Dual Fuel

P286-1600
- 2-4 Wire Applications

PART NO	STAGES	FUNCTION	DIMENSIONS H x W x D	PROGRAMMING
P286-1200	2H,1C	H/C,HP	4.75" x 5.76" x 1.25"	NON PROG. or 7 Days
P286-1300	3H,2C	H/C,HP	4.75" x 5.76" x 1.25"	NON PROG. or 7 Days
P286-1400	3H,2C	H/C,HP	4.75" x 5.76" x 1.25"	NON PROG. or 7 Days
P286-1500	3H,2C	H/C,HP, DF	4.75" x 5.76" x 1.25"	NON PROG. or 7 Days
P286-1600	2H,1C	H/C,HP	4.75" x 5.76" x 1.25"	NON PROG. or 7 Days

CUSTOM LOGO PROGRAM

All Totaline, Carrier and Bryant thermostats are available with your choice of two custom logo program options.

Small Business Professional

- Minimum case quantity of 24 (or 25 where applicable)
- Mix and match with same face
- Up to three lines of text only
- Your choice of black, gray, red or blue in Aerial font

Elite

- Minimum quantity of 50 thermostats
- Mix and match with same face
- Includes logo and up to three lines of text
- Your choice of font and color (up to four colors)

- High quality silk-screened text or logo imprints
- All stock orders shipped within seven to 10 business days after receipt of order
- Contact your Totaline representative for details

TOTALINE THERMOSTAT ACCESSORIES

ACCESSORIES FOR TOTALINE GOLD THERMOSTATS

PART NO	DESCRIPTION	FOR USE WITH
P274-0400	Outdoor Sensor	P274-0200, 0300, 1100, 1200, 1300, 2100
P274-0401	Remote Sensor	P274-2100
P274-0410	5 to 4 Wire Converter	All “Gold” thermostats
P274-0420	Wall Plate (small)	P274-0100, 0200, 0300
P274-0421-C	Wall Plate (large)	All “Gold” thermostats

ACCESSORIES FOR SIGNATURE THERMOSTATS

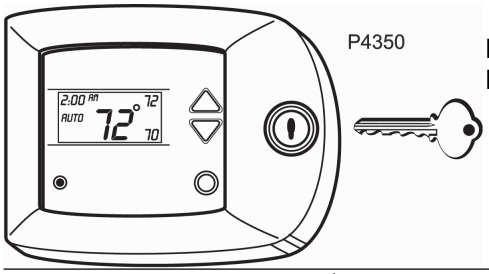

P4350

P374-0620
Locking Cover for Signature

PART NO	DESCRIPTION	FOR USE WITH
P374-0420	Wall Plate for Non-programmable (small)	P374-0000, 0100, 0200, 0300
P374-0440	Door for Programmable	P374-1700, 1800, 1900, 2700, 2800, 2900
P374-0600	Locking Cover for Flushmount	P374-1000FM, 1100FM, 2200FM, 2300FM
P374-0610	Stainless Steel Locking Cover for Flushmount	P374-1000FM, 1100FM, 2200FM, 2300FM
P374-0620	Locking Cover for Signature	P374-2700, P374-2800, P374-2900
P474-0400	Outdoor Sensor	P374-1000FM, 1100FM, 1700, 1800, 1900, 2300FM, 2700, 2800, 2900
P474-0401	Remote Sensor w/Button	P374-1000FM, 1100FM, 1800, 1900, 2300FM, 2700, 2800, 2900
P474-0401RF	Wireless Remote Sensor w/Button Transmitter	P374-1000FM, 1100FM, 1700, 1800, 1900, 2300FM, 2700, 2800, 2900
P474-0401REC	Wireless Remote Receiver	P374-1000FM, 1100FM, 1700, 1800, 1900, 2300FM, 2700, 2800, 2900
P474-0410	Add-A-Wire	All thermostats
P474-0430	Duct Sensor	P374-1000FM*, P374-1100*, 1100FM*, 1500*,1600*, 2100†, 2300††,, 2300FM†
P474-0500	Resistor for Power-sharing	All Programmable thermostats
P474-0900	Opto-Isolator for Thermostats	P374-2700, P374-2900

ACCESSORIES FOR STAR THERMOSTATS

PART NO	DESCRIPTION	FOR USE WITH
P474-0410	Add-A-Wire	All thermostats
P474-0421	Wall Plate	P474-0100,0220, 1010, 1020, 1050, 2050, 2150
P474-0421-L	Large Wall Plate Cover	P474-0100, 0220, 1010, 1020, 1050, 2050, 2150
P474-0421-S	Small Backplate w/“J” Box Adapter	P474-0100, 1050
P474-0423	Wall Plate	P474-0130, 0140, 1035
P474-0500	Resistor for Power-sharing	All Programmable Thermostats
P474-0600	Locking Cover	P474-1020, 1050, 2050, 2150
P474-0800	Adapter Battery Pack for Wireless Transmitter	P474-1100RF, 2300RF
P474-0900	Opto-Isolator For Thermostats	P474-2300RF

TOTALINE THERMOSTATS

ACCESSORIES FOR THE REDESIGNED SIGNATURE SLIMLINE THERMOSTATS

EZ PROGRAMMER (P374-0432)

- Allows quick and easy copying from one thermostat to the next
- Choose from clock time period programming, or all data copy
- Battery backup keeps the clock and day of the week current
- Stores data from all Slimline Premier models simultaneously

FOR USE WITH:
P374-1700
P374-1800
P374-1900
P374-2700
P374-2800
P374-2900

REMOTE CONTROL AND RECEIVER (P374-0431)

- Allows remote control operation of basic thermostat functions
- Unique 'Warmer' & 'Cooler' commands

FOR USE WITH:
P374-1700
P374-1800
P374-1900
P374-2700
P374-2800
P374-2900

COMFORT CALL (P034-0433) – Used with the Models Above

- Allows simple remote control of you thermostat through the telephone.
- Cell phone compatible.
- Voice recognition or touch-tone entry.
- Announces indoor and outdoor temperature.
- Wireless technology (Easy to Install)
- No subscription service needed -
  - Use your own telephone number

HUMIDITY MODULE (P374-0430)

- Simple, snap-in module provides humidify/dehumidify control between the thermostat and HVAC unit equipped with humidification/dehumidification system
- Displays relative humidity level as measured at the thermostat location

FOR USE WITH:
P374-1800
P374-2700
P374-2800
P374-2900

TOTALINE THERMOSTAT GUARDS



P593 Metal



P594 Plastic

- Metal: beige
- Plastic: beige or clear
- Sizes fit most thermostats
- Solid and ring bases
- Have key lock
- Virtually tamper proof

Extra Key PN: F145-0999
- Fits all Metal and Plastic models

Metal

PART NO	WIDTH (in)	HEIGHT (in)	DEPTH (in)	BASE	STYLE
P269-0015	6	3-3/16	3-1/8	Ring	Beige
P269-0016	6-1/4	4-3/4	3	Solid	Beige
P269-0017	7-1/4	5-3/8	3-1/2	Solid	Beige
P269-0018	6-3/4	4-1/4	3-9/16	Ring	Beige

Plastic

PART NO	WIDTH (in)	HEIGHT (in)	DEPTH (in)	BASE	STYLE
P269-0001	3-7/8	3-1/2	2-1/2	Solid	Clear
P269-0003	5-1/4, 5-1/4	4-5/8, 4-5/8	3, 3-1/4	Solid,Ring	Clear,Clear
P269-0004	5-1/4, 5-1/4	4-5/8, 4-5/8	3, 3-1/4	Solid,Ring	Beige,Beige
P269-0005	6-3/8, 6-3/8	3-1/2, 3-1/2	3, 3-1/4	Solid,Ring	Clear,Clear
P269-0007	8-1/4	5-3/8	3-1/2	Ring	Clear